
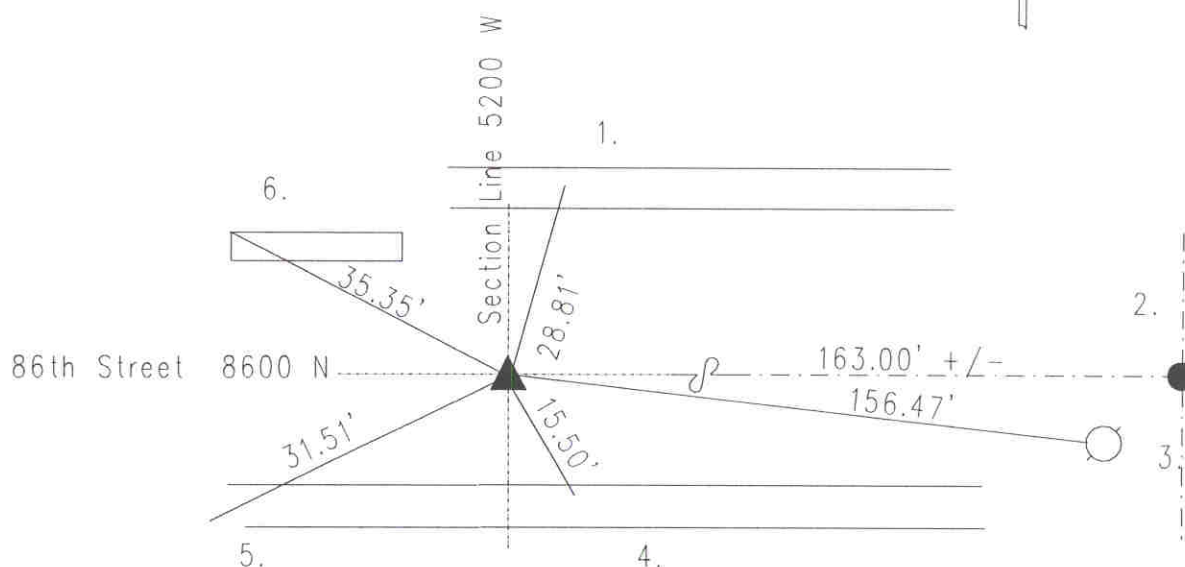


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 24 TOWNSHIP 17 RANGE 2
DATE: 8-3-02
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 5-15-95
4-13-2000

IN. S.P.C. E ZONE, NAD 83
NAME: 17022402
N: 517803.0106(m)
E: 50094.6397(m)

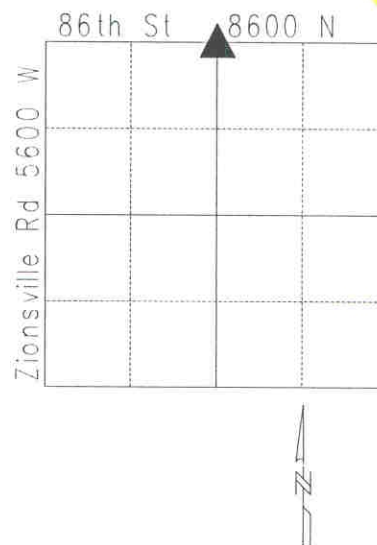

Original post set 1821 by Laughlin with witnesses: 8" beech N 39 E 13 links, dogwood S 17 W 22 links per Marion County Atlas pg. 4. Fatout 1875 called a rock set with witnesses: a stone in fence line N 47 1/2 E 39 links; stone in fence line S 30 W 32 1/2 links per Pike Township Legal Survey Book pg. 39. Monroe 9-2-59 called brass bolt with washer. Wilcoxon 8-9-73 called same. Miller 5-2-75 called rod with washer. Gries 3-15-88 called same. Excavated 5-12-95 by Kiste. Harrison set. Re-tied 4-13-2000 by Wilcoxon. Harrison monument and coordinate checked and verified by T. Kiste on 3-28-02 for details see back up folder.

HC 722402

REF.	DISTANCE	DESCRIPTION
1.	28.81'	Mag nail in curb joint
2.	163.00'	Due E to bridge joint
3.	156.47'	C/L Harrison marker
4.	15.50'	PK nail in curb joint for median
5.	31.51'	PK nail in curb joint for median
6.	35.35'	Top NW corner of inlet